



Description

The L2122LT is a 3 way (two active and one passive) mid-high cabinet. The mid section consists of two extremely powerful 12", coupled to a long throw wooden non resonant horn. The high section consist of a 2" compression driver and two 1", filtered passively. These 3 compression drivers are protected with an active PSS device that prevents failure situations. The 2" is coupled to a non resonant wooden-aluminium horn , while the 1" are attached to the throat of the 12" horns. The frequency response is very flat without any colouration. Ideally suited for large live and disco sound reinforcements, where very high pressure levels are required. It's made of birch plywood and painted in a weather proof texture black finish. Can incorporate castors as an option.


Applications

It can be used, together with a bass cabinet, for touring and large venue installations, such as discos, live concerts, auditoriums...




 Active PC
version
available


FRONT

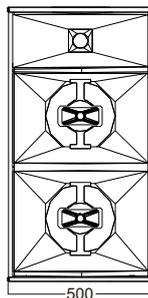


RIGHT



BACK

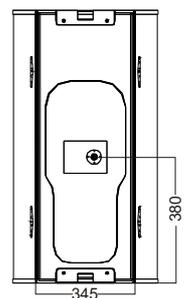



TOP



TECHNICAL SPECIFICATIONS

Frequency Response (Hz)	150 Hz-20KHz □ 4dB
Power Handling:	Mid 1000 watts R.M.S. , High 300 W RMS
Sensitivity	Mid:107 dB, High:110 dB (1 watt / 1 meter)
Nominal peak	136 dB
Coverage angle	60° Horizontal 40° Vertical
Crossover	active: 185 Hz/2.5 KHz. Passive 6.5 KHz
Impedance	Mid 4 ohm. High 8 ohm.
Drivers	2x12" + 1x2" + 2x1"
Connectors	1x8pin spk + 2x4pin spk
Dimensions	96x50f/34.5r x 52 cm (H x W x D)
Recommended amplifiers	Mid:1000 vatts into 4 ohm High:300 watts into 8 ohm
Weight	68 Kg

DIAGRAMS

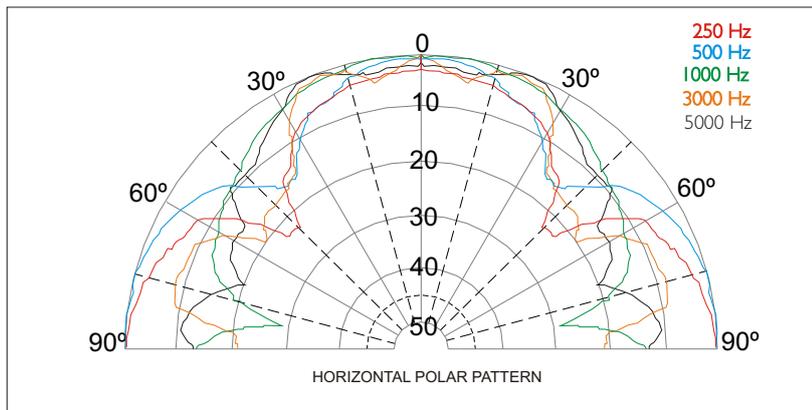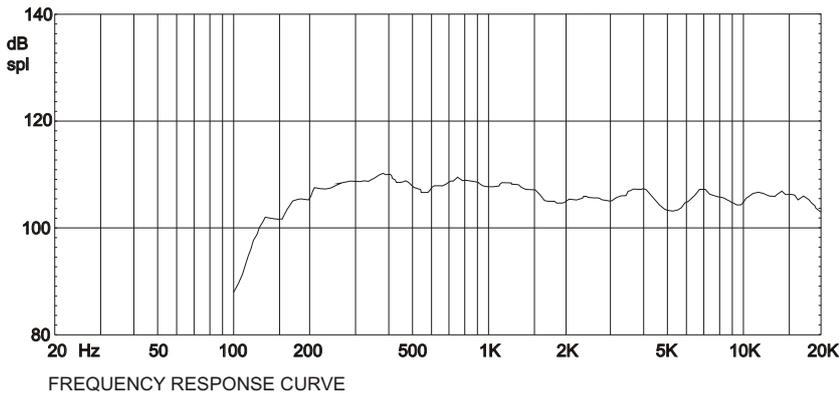

Pº Ind. Monte Boyal. C/Encinar 282
45950 Casarrubios del Monte (Toledo). SPAIN.
Phone: +34 918 170 110
Fax: +34 918 183 053
www.tecnare.com
exel@tecnare.com